

THE NEW VALUE FRONTIER



Helical end mill for  
titanium alloy machining

**MECHT**

# MECHT




New helical end mill design added to the MECH product line

## Unique design for stable titanium alloy milling

- Insert size combination for increased stability
- Special holder design for increased reliability
- Excellent chip evacuation

Longer tool life with low-resistance JS chipbreaker and tough PVD coating technology

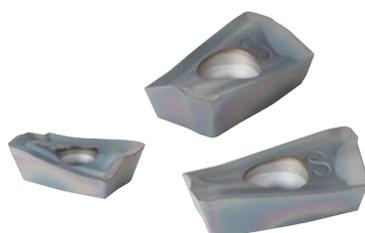

Helical end mill for titanium alloy machining


# MECHT

Insert size combination improves roughing capabilities  
Maintains stable machining and long tool life

## 1 Developed to reduce chattering and chip recutting issues

### Unique insert combination

The larger bottom inserts are positioned to handle larger cutting forces (excluding  $\phi 32$ )  
Stable machining with improved fracture resistance

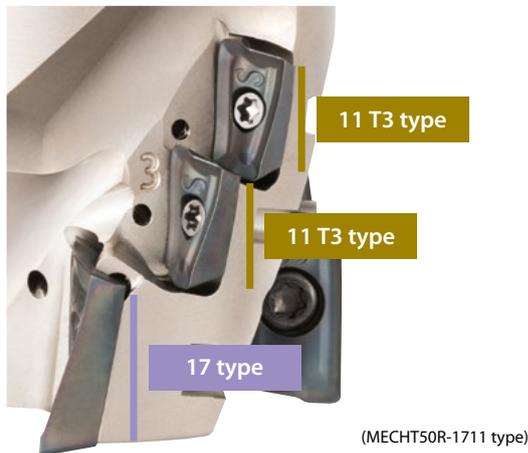

### New design for higher reliability

Bottom inserts are held in place by double-faced contacts



**Bore dia.**  
Larger bore diameter improves fastening power and reduces chattering  
 $\phi 50$  mm cutter with a  $\phi 27$  mm bore (conventional bore:  $\phi 22$  mm)

**Toolholder hardness** Hardened 15% more than conventional holders

**Toolholder spec** Custom ordering available  
Custom number of inserts and stages

### Excellent chip evacuation

#### New flute design

Large, smooth flutes prevent chip clogging

MECHT ( $\phi 50$ -4T 3 stages)

Conventional ( $\phi 50$ -4T 4 stages)



#### Smooth design

#### All inserts have coolant holes

Optimized hole diameter controls flow amount and pressure

Smooth chip evacuation as well as superior cooling of the cutting edge




## 2 Longer tool life with low-resistance JS chipbreaker and tough PVD coating

**Low cutting force JS chipbreaker**

Heat at the cutting edge is suppressed due to sharp cutting performance  
Long tool life


**Greater toughness PR1535**

Fracture resistant with a tough substrate and high heat-resistant MEGACOAT NANO coating technology

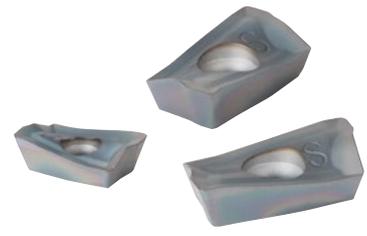


Tool life comparison (internal evaluation)

**MECHT showed good cutting edge condition, and tool life was 50% longer than competitor B.**

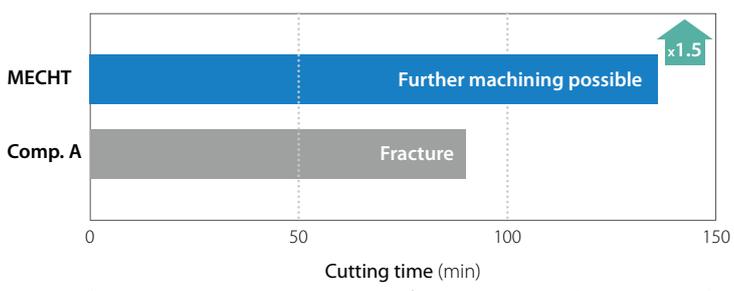

Cutting edge after machining 50 min



Cutting conditions:  $V_c = 40$  m/min,  $ap \times ae = 43 \times 20$  mm,  $f_z = 0.12$  mm/t,  $\phi 50$  (5 Flutes), wet (external and internal coolant), workpiece: Ti6Al4V Machine: BT50

Slotting titanium alloy (internal evaluation)

**$ap = 20$  mm (0.4xDC)**

**Stable machining without chip clogging or chattering**




Cutting conditions:  $V_c = 40$  m/min,  $ap \times ae = 20 \times 50$  mm (Slotting),  $f_z = 0.08$  mm/t  $\phi 50$  (5 Flutes), wet (external and internal coolant), workpiece: Ti6Al4V Machine: BT50

### Case study

**Aerospace part Ti6Al4V**

$V_c = 55$  m/min ( $n = 350$  min<sup>-1</sup>)  
 $ap \times ae = 24 \times 16$  mm  
 $f_z = 0.09$  mm/t ( $V_f = 126$  mm/min)  
Wet (Internal coolant)



MECHT50R-1711-3-4T-M  
BDMT170408ER-JS PR1535 (first stage)  
BDMT11T308ER-JS PR1535 (second and third stage)

Cutting efficiency




MECHT showed good chip evacuation and stable machining even with increasing feed rate. Machining efficiency was 50% better than that of the competitor with equivalent tool life. User evaluation

### Recommended cutting conditions

Workpiece	Applications	Depth of cut (mm)		$f_z$ (mm/t)	Recommended insert grade ( $V_c$ : m/min)
		$ap$	$ae$		MEGACOAT NANO
Titanium alloy (Ti6Al4V)	Shouldering	~Length of Cut (APMX)	~0.5DC	0.10 ~ 0.12 ~ 0.16	30 ~ 40 ~ 60
	Slotting	~0.5DC	1DC	0.05 ~ 0.07 ~ 0.09	30 ~ 40 ~ 50

# MECHT

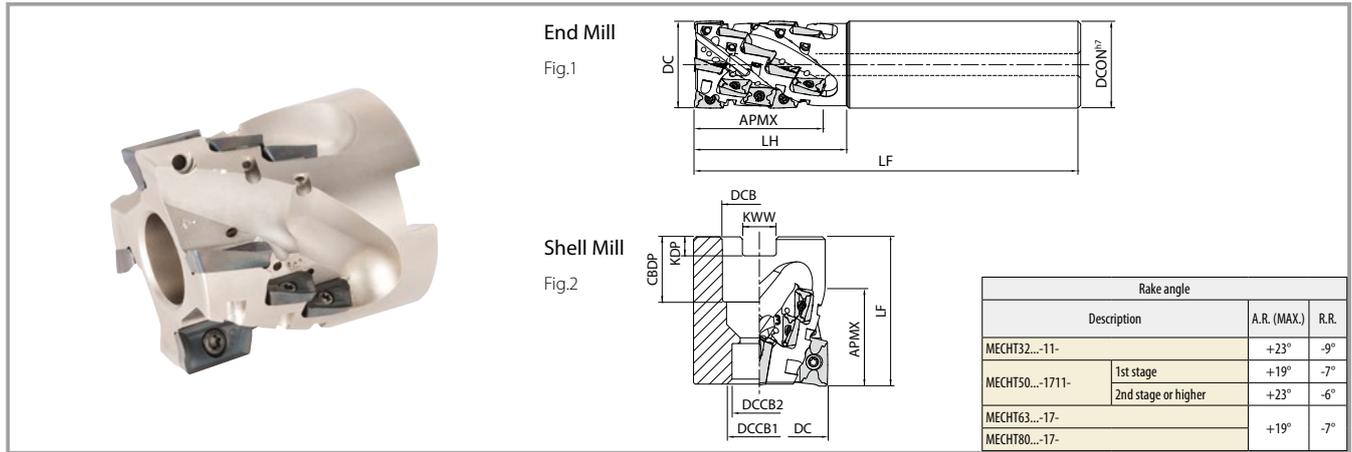

## Toolholder dimensions

### End mill

Description	Availability	No. of flutes	No. of stages	No. of inserts	Dimensions (mm)					Shape	Spare parts		Applicable inserts	
					DC	DCON	LF	LH	APMX		Clamp screw	Wrench	1st stage	2nd stage or higher
MECHT 32-532-11-5-4T	●	4	5	20	32	32	140	55	46	Fig.1	SB-2555TRG	DTM-8	BDMT11T3**	*1BDMT11T308**

### Shell mill

Description	Availability	No. of flutes	No. of stages	No. of inserts	Dimensions (mm)										Shape	Spare parts			Applicable inserts	
					DC	DCB	DCCB <sub>1</sub>	DCCB <sub>2</sub>	LF	CDBP	KDP	KWW	APMX	Clamp screw		Wrench	Arbor bolt	1st stage	2nd stage or higher	
																				SB-2555TRG
MECHT 50R-1711-3-4T-M	●	4	3	12	50	27	20	14	55	24	7	12.4	34	Fig.2	SB-2555TRG	DTM-8	HH12X40	BDMT1704**	*1BDMT11T308**	
									65								HH12X50			
MECHT 63R-17-4-5T-M	●	5	4	20	63	27	20	14	80	24	7	12.4	60	Fig.2	SB-4070TRN	DTM-15	HH12X65	BDMT1704**	*1BDMT170408**	
MECHT 80R-17-4-6T-M	●	6	4	24	80	32	26	17	28	8	14.4	HH16X65								

\*1. Use inserts with corner R of 0.8 or less for the 2nd or higher stages  
 Machining with coolant is recommended (Internal coolant pressure 1.5 MPa or higher) ●: Available  
 🛠️ Coat anti-seize compound (P-37) thinly on the taper and the thread of the clamp screw when mounting inserts

## Applicable inserts

Shape Handed insert shows right-hand	Description	Dimensions (mm)					Angle		MEGACOAT NANO	
		W1	S	D1	L	RE	AS	AN	PR1535	
<p>Low cutting force</p>	BDMT 11T302ER-JS	6.7	3.8	2.8	11.0	0.2	18°	13°	●	
	11T304ER-JS					0.4			●	
	11T308ER-JS					0.8			●	
	BDMT 170404ER-JS	9.6	4.9	4.4	17.0	0.4	18°	13°	●	
	170408ER-JS					0.8			●	

General JT chipbreaker and notched insert (only if holder has an even number of inserts) can also be used. ●: Available  
 For more information, please contact your Kyocera sales representative.